SOPORTES - MOUNTS - SUPPORTS

E&B RUBBER METAL

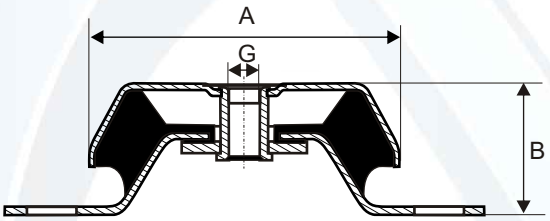

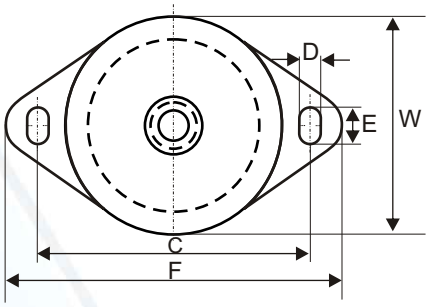

The mounts Egamount provide an elastic support mechanism for equipment isolation and protect against any unwanted vibrations. They may be used in generator sets, motors, pumps, rolling mills, printing machinery, textile machinery...

With the EGAMOUNT shock is avoided as well as the transmission of noise and vibration to the surrounding equipment. The horizontal stiffness is greater than the vertical stiffness. This prevents any unwanted sliding movement of equipment.

Thanks to the specific design, rubber does not come into contact with oil or grease. This model has built in fail safe design which means it suitable for mobile applications.

Todos los modelos están fabricados con la arandela de seguridad (Fail Safe).
All models are manufactured with Lockwasher (Fail Safe).

AMORTIGUADORES EGA MOUNT VSERIES

Model	A mm	B mm	C mm	D mm	E mm	F mm	W mm	G mm	Load Kgs/Pc.
EGA-V-60-a	65	33	89	9	16	110	63	M10	30-75
EGA-V-60-b	65	33	89	9	16	110	63	M10	80-120
EGA-V-60-c	65	33	89	9	16	110	63	M10	100-140
EGA-V-85-a	85	37	112	10	15	135	84	M12	100-200
EGA-V-85-b	85	37	112	10	15	135	84	M12	160-350
EGA-V-85-c	85	37	112	10	15	135	84	M12	240-450
EGA-V-90-a	90	36	112	10	15	135	84	M12	100-200
EGA-V-90-b	90	36	112	10	15	135	84	M12	160-350
EGA-V-90-c	90	36	112	10	15	135	84	M12	240-450
EGA-V-105-a	110	42	145	14	21	175	112	M16	200-360
EGA-V-105-b	110	42	145	14	21	175	112	M16	300-500
EGA-V-105-c	110	42	145	14	21	175	112	M16	420-700
EGA-V-150-a	151	53	187	14.2	20	218	145	M16	600-900
EGA-V-150-b	151	53	187	14.2	20	218	145	M16	900-1300
EGA-V-150-c	151	53	187	14.2	20	218	145	M16	1200-2000

Dureza/ Hardness a-40/45Sh, b-60/65Sh, c-70/75Sh