RUBBER METAL BONDED PRODUCTS

E&B RUBBER METAL

EGA-60

EGA-90

EGA-105

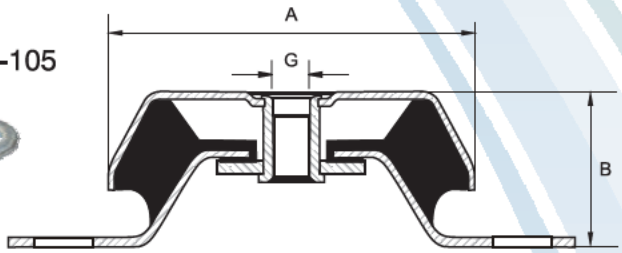

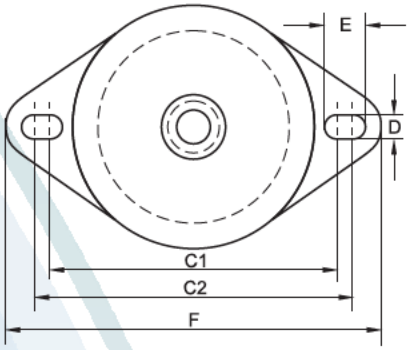

The mounts Egamount provide an elastic support mechanism for equipment isolation and protect against any unwanted vibrations. They may be used in generator sets, motors, pumps, rolling mills, printing machinery, textile machinery...

With the EGAMOUNT shock is avoided as well as the transmission of noise and vibration to the surrounding equipment. The horizontal stiffness is greater than the vertical stiffness. This prevents any unwanted sliding movement of equipment.

Thanks to the specific design, rubber does not come into contact with oil or grease.

This model has built in fail safe design which means it suitable for mobile applications.

All models are manufactured with Lockwasher (Fail Safe).

EGA MOUNT SERIES

Model	A mm	B mm	C1 mm	C2 mm	D mm	E mm	F mm	G mm	Load Kgs/Pc.
EGA-60-a	65	33	77.0	91	9	16	110	M10	30-75
EGA-60-b	65	33	77.0	91	9	16	110	M10	80-120
EGA-60-c	65	33	77.0	91	9	16	110	M10	100-140
EGA-85-a	85	37	105.5	116	10	15	135	M12	100-200
EGA-85-b	85	37	105.5	116	10	15	135	M12	160-350
EGA-85-c	85	37	105.5	116	10	15	135	M12	240-450
EGA-90-a	90	36	105.5	116	10	15	135	M12	100-200
EGA-90-b	90	36	105.5	116	10	15	135	M12	160-350
EGA-90-c	90	36	105.5	116	10	15	135	M12	240-450
EGA-105-a	111	42	135.0	149	14	21	175	M16	200-360
EGA-105-b	111	42	135.0	149	14	21	175	M16	300-500
EGA-105-c	111	42	135.0	149	14	21	175	M16	420-700
EGA-120-a	121	45	156.0	164	14	21	186	M20	250-400
EGA-120-b	121	45	156.0	164	14	21	186	M20	400-700
EGA-120-c	121	45	156.0	164	14	21	186	M20	500-900
EGA-150-a	151	53	176.5	188	14	20	218	M16	600-900
EGA-150-b	151	53	176.5	188	14	20	218	M16	900-1300
EGA-150-c	151	53	176.5	188	14	20	218	M16	1200-2000

Hardness a-40/45Sh, b-60/65Sh, c-70/75Sh